


# MiniMe FF8

## Front Firing Powered Mini Subwoofer

Model:  
MiniMe FF8

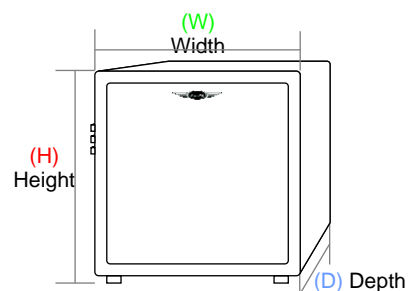

MiniMe FF8

(H) Height w/ feet	10-1/4"
(W) Width	9-3/4"
(D) Depth	10-3/4"



### OBJECTIVE

While the MiniMe P8 and FF8 share some of the same components, the MiniMe FF8 has a front firing enclosure which allows it to be placed in tight spots where non front firing subwoofers cannot fit.

The MiniMe FF8 subwoofer is built for custom installers and people who love to experience music and movies at full throttle but are disinterested in seeing the hardware that delivers the thrills.

The MiniMe FF8 is a subwoofer that custom installers approve of and consumers love. Because of its sealed design and front firing enclosure, it keeps up to speed with even the most demanding material.

### INTENDED USE

- ✓ Contractors, Custom Installers & Retailers
- ✓ Front Firing for Multiple Applications
- ✓ Home Theaters/5.1 & 2-Channel Music Systems
- ✓ Town Homes/Condos/Apartments
- ✓ Cabinets & Tight Spots

### SPECIAL FEATURES & HIGHLIGHTS

- Front firing design for multiple applications
- 320-Watt class "D" powered amplifier with automatic signal-sensing turn-on and stand-by mode for longer life, more efficiency and less power consumption (greener)
- Sub operation switch for different ranges
- High gloss multi-layer piano black lacquer finish with a mirror shine
- Long throw, premium quality drivers
- Operation status LEDs
- RCA & high level inputs
- Selective variable crossover

### SPECIFICATIONS

MiniMe FF8

Amplifier Power	320 Watts Class "D"
Frequency Response	27 - 160Hz
Driver Size	8"
Finish	7-layer piano black lacquer
MSRP	\$899.00/pc